

# Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

## Half-turn staircase without risers, with and without railing on one side



**Owner of the declaration:**

Sindal Trappen ApS

**Product:**

Half-turn staircase without risers, with and without railing on one side

**Declared unit:**

1 pcs

**This declaration is based on Product Category Rules:**

CEN Standard EN 15804:2012+A2:2019 serves as core PCR  
NPCR 015:2021 Part B for wood and wood-based products for use in construction

**Program operator:**

EPD-Global

**Declaration number:**

NEPD-14000-14267

**Issue date:**

10.11.2025

**Valid to:**

10.11.2030

**EPD software:**

LCAno EPD generator ID: 1285099

## General information

### Product

Half-turn staircase without risers, with and without railing on one side

### Program operator:

EPD-Global  
Post Box 5250 Majorstuen, 0303 Oslo, Norway  
Phone: +47 977 22 020  
web: [www.epd-global.com](http://www.epd-global.com)

### Declaration number:

NEPD-14000-14267

### This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR  
NPCR 015:2021 Part B for wood and wood-based products for use in construction

### Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD-Global shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

### Declared unit:

1 pcs Half-turn staircase without risers, with and without railing on one side

### Declared unit with option:

A1-A3, A4, A5, C1, C2, C3, C4, D

### Functional unit:

1 unit of manufactured staircase, installed and waste treated at end-of-life

### General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Global's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Global, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Global's General Programme Instructions for further information on EPD tools

### Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPD-Global's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Alexander Borg, Asplan Viak AS

(no signature required)

### Owner of the declaration:

Sindal Trappen ApS  
Contact person: Brian Jensen  
Phone: +45 61 30 80 29  
e-mail: [mail@sindaltrappen.dk](mailto:mail@sindaltrappen.dk)

### Manufacturer:

Sindal Trappen ApS

### Place of production:

Sindal Trappen ApS  
Spurvevej 10  
9870 Sindal, Denmark

### Management system:

### Organisation no:

DK32663443

### Issue date:

10.11.2025

### Valid to:

10.11.2030

### Year of study:

### Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

### Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD-Global.

Developer of EPD: Emil Pedersen - Nordic LCA

Reviewer of company-specific input data and EPD: Børge Heggen Johansen, Energiråd AS

### Approved:



Håkon Hauan, CEO EPD-Global

## Product

### Product description:

Wooden staircase for indoor housing with a width of 90–95 cm. The staircase is made of solid wood.

### Product specification

The staircase is constructed from solid wood, primarily pine and oak. Additional wood types may also be included. Adhesives, metal fasteners, and surface treatments are used in the production to ensure stability, durability, and a high-quality finish.

Materials	kg	%
Chemical	8.00	2.65
Glue for wood	1.50	0.4977
Metal - Stainless steel	0.10	0.03318
Wood - Solid oak	112.30	37.26
Wood - Solid pine	179.50	59.56
Total	301.40	100.00

### Technical data:

Wood materials: Solid pine and oak.

Adhesives: High-strength glue suitable for indoor staircase applications.

Fasteners: Metal screws provide reinforcement and secure assembly.

Surface treatment: Protective coatings applied for durability, aesthetics, and resistance to wear.

Production quality: All wood is processed and finished to meet requirements for indoor housing staircases with a width of 90–95 cm

### Market:

Denmark

### Reference service life, product

50 years

### Reference service life, building or construction works

## LCA: Calculation rules

### Declared unit:

1 pcs Half-turn staircase without risers, with and without railing on one side

### Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

### Allocation:

The allocation is made in accordance with the provisions of EN 15804. In forestry, economic allocation between sawn timber and solid wood is used. At sawmills, energy, water, waste, materials and internal transport are divided into sub-processes and then allocated according to income between the main and secondary products. Environmental impact and resource consumption for the primary production of recycled materials is allocated to the original product system.

### Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Chemical	ecoinvent 3.6	Database	2019
Glue for wood	ecoinvent 3.6	Database	2019
Metal - Stainless steel	Modified ecoinvent 3.6	Database	2019
Wood - Solid oak	modified ecoinvent 3.6	Database	2019
Wood - Solid pine	modified ecoinvent 3.6	Database	2019

**System boundaries (X=included, MND=module not declared, MNR=module not relevant)**

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X

**System boundary:**

This Environmental Product Declaration (EPD) is based on a cradle-to-grave approach and includes the following life cycle modules, in accordance with EN 15804:

**A1–A3 (Product stage):**

Covers the extraction and processing of raw materials, transportation of materials to the production site, and the manufacturing of the staircase components. This includes the processing of solid wood, adhesives, metal fasteners, and surface treatments.

**A4 (Transport):**

Accounts for the transportation of the finished staircase from the production site to the place of installation.

**A5 (Construction/installation):**

Includes the activities related to on-site installation of the staircase, such as handling, assembly, use of fasteners and adhesives, and disposal of packaging materials.

**C1 (Deconstruction/demolition):**

Refers to the dismantling of the staircase at the end of its service life.

**C2 (Transport):**

Covers the transport of dismantled materials to waste treatment or recycling facilities.

**C3 (Waste processing):**


Includes processes such as sorting, shredding, and other pre-treatment before final disposal or recycling.

**C4 (Disposal):**

Accounts for the final disposal of materials not suitable for recycling or energy recovery (e.g., landfill or incineration without energy use).

**D (Benefits and loads beyond the system boundary):**

Considers potential benefits and avoided impacts from the recycling and energy recovery of materials, such as reuse of wood in secondary applications or energy generation from waste wood, as well as metal recycling.

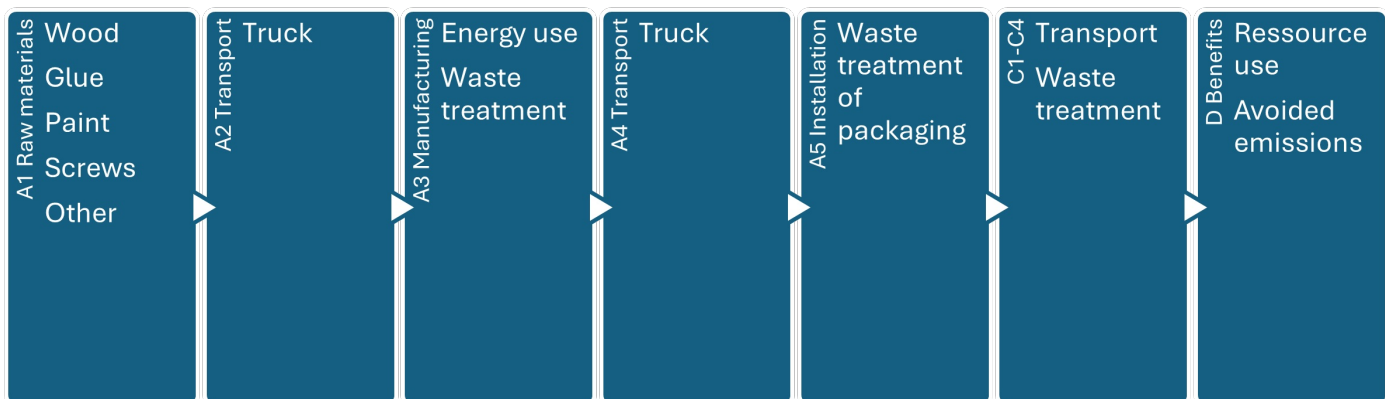

**Additional technical information:**

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Van, diesel, Mercedes Sprinter, 2.5t/cap 1.15t (kgkm) - RER	19.7 %	300.00	0.416	l/tkm	124.80
<b>De-construction demolition (C1)</b>					
	<b>Unit</b>	<b>Value</b>			
Demolition of building per kg (kg) - GLO - C1	kg	301.40			
<b>Transport to waste processing (C2)</b>					
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, unspecified (kgkm) - RER	48.7 %	50.00	0.051	l/tkm	2.55
<b>Waste processing (C3)</b>					
	<b>Unit</b>	<b>Value</b>			
Waste treatment per kg Wood, incineration with fly ash extraction (kg)	kg	301.40			
Balancing waste - RPEM (MJ) - (Type 4)	MJ	5511.08			
Balancing waste - Biogenic carbon in product (kg) - (Type 4)	kg	480.50			
<b>Disposal (C4)</b>					
	<b>Unit</b>	<b>Value</b>			
Landfilling of ashes from incineration of Wood, process per kg ashes and residues (kg)	kg	3.47			
<b>Benefits and loads beyond the system boundaries (D)</b>					
	<b>Unit</b>	<b>Value</b>			
Substitution of Electricity, Denmark (kWh)	kWh	209.60			
Substitution of District heating, Denmark (MJ)	MJ	3171.11			

## LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
GWP-total	kg CO <sub>2</sub> -eq	-3.15E+02	1.81E+02	0	3.98E-01	1.98E+00	4.84E+02	1.49E-01	-1.51E+02	
GWP-fossil	kg CO <sub>2</sub> -eq	1.64E+02	1.80E+02	0	3.97E-01	1.98E+00	3.69E+00	1.49E-01	-1.49E+02	
GWP-biogenic	kg CO <sub>2</sub> -eq	-4.81E+02	1.59E-01	0	7.45E-05	8.51E-04	4.81E+02	8.08E-05	-3.08E-01	
GWP-luluc	kg CO <sub>2</sub> -eq	1.37E+00	8.79E-02	0	3.13E-05	7.02E-04	5.63E-04	2.41E-05	-1.75E-01	
ODP	kg CFC11 -eq	1.47E-05	3.36E-05	0	8.59E-08	4.52E-07	3.08E-07	1.77E-08	-5.46E-06	
AP	mol H+ -eq	9.22E-01	8.65E-01	0	4.16E-03	1.13E-02	4.72E-02	5.53E-04	-9.41E-01	
EP-FreshWater	kg P -eq	1.74E-02	3.44E-03	0	1.45E-06	1.63E-05	6.17E-05	1.98E-06	-9.38E-03	
EP-Marine	kg N -eq	2.24E-01	2.15E-01	0	1.84E-03	4.04E-03	2.26E-02	1.75E-04	-1.55E-01	
EP-Terrestrial	mol N -eq	2.70E+00	2.41E+00	0	2.01E-02	4.45E-02	2.40E-01	1.99E-03	-2.15E+00	
POCP	kg NMVOC -eq	9.43E-01	7.57E-01	0	5.54E-03	1.27E-02	5.90E-02	5.52E-04	-4.73E-01	
ADP-minerals&metals <sup>1</sup>	kg Sb-eq	2.38E-03	1.63E-02	0	6.10E-07	5.14E-05	1.49E-05	9.29E-07	-8.56E-04	
ADP-fossil <sup>1</sup>	MJ	2.36E+03	2.57E+03	0	5.47E+00	3.04E+01	2.94E+01	1.47E+00	-1.77E+03	
WDP <sup>1</sup>	m <sup>3</sup>	4.24E+04	3.23E+03	0	1.16E+00	2.89E+01	7.16E+01	1.36E+01	-1.75E+04	







GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9.0 E-03 = 9.0\*10<sup>-3</sup> = 0.009"

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

### Remarks to environmental impacts











## Additional environmental impact indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
 PM	Disease incidence	2.27E-05	7.96E-06	0	1.10E-07	1.81E-07	4.93E-07	7.22E-09	-8.02E-06
 IRP <sup>2</sup>	kgBq U235 -eq	1.28E+01	1.03E+01	0	2.34E-02	1.33E-01	5.72E-02	6.83E-03	-5.91E+00
 ETP-fw <sup>1</sup>	CTUe	4.41E+03	3.68E+03	0	2.99E+00	2.28E+01	5.86E+01	2.46E+00	-4.84E+03
 HTP-c <sup>1</sup>	CTUh	1.85E-07	1.81E-07	0	0.00E+00	0.00E+00	1.05E-08	1.21E-10	-6.67E-08
 HTP-nc <sup>1</sup>	CTUh	3.46E-06	3.44E-06	0	2.71E-09	3.01E-08	5.20E-07	4.45E-09	-2.21E-06
 SQP <sup>1</sup>	dimensionless	2.56E+04	1.09E+03	0	6.94E-01	2.61E+01	4.37E+00	4.64E+00	-8.00E+03

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9.0 E-03 = 9.0\*10<sup>-3</sup> = 0.009"

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 PERE	MJ	7.35E+03	7.29E+01	0	2.96E-02	4.37E-01	9.72E-01	7.81E-02	-2.23E+03	
 PERM	MJ	5.51E+03	0.00E+00	0	0.00E+00	0.00E+00	-5.51E+03	0.00E+00	0.00E+00	
 PERT	MJ	1.29E+04	7.29E+01	0	2.96E-02	4.37E-01	-5.51E+03	7.81E-02	-2.23E+03	
 PENRE	MJ	2.36E+03	2.57E+03	0	5.47E+00	3.04E+01	2.94E+01	1.47E+00	-1.77E+03	
 PENRM	MJ	0.00E+00	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
 PENRT	MJ	2.36E+03	2.57E+03	0	5.47E+00	3.04E+01	2.94E+01	1.47E+00	-1.77E+03	
 SM	kg	6.48E-03	0.00E+00	0	2.69E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
 RSF	MJ	4.51E+01	1.84E+00	0	7.28E-04	1.55E-02	2.26E-02	1.95E-03	-3.58E+01	
 NRSF	MJ	9.92E-01	-1.06E+01	0	1.07E-02	5.46E-02	0.00E+00	1.07E+00	-4.50E-01	
 FW	m <sup>3</sup>	5.28E+00	5.97E-01	0	2.82E-04	3.45E-03	6.13E-02	1.35E-03	-3.57E+00	

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9.0 E-03 = 9.0\*10<sup>-3</sup> = 0.009"

### End of life - Waste

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	9.44E-01	6.68E-01	0	1.61E-04	1.64E-03	0.00E+00	2.52E+00	-3.25E-01
NHWD	kg	4.08E+01	7.34E+01	0	6.48E-03	1.89E+00	0.00E+00	9.50E-01	-1.05E+01
RWD	kg	1.07E-02	1.52E-02	0	3.80E-05	2.07E-04	0.00E+00	7.26E-06	-1.58E-03

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9.0 E-03 = 9.0\*10<sup>-3</sup> = 0.009"

### End of life - Output flow

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
CRU	kg	0.00E+00	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	kg	1.06E-01	0.00E+00	0	2.64E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER	kg	7.23E-06	0.00E+00	0	8.18E-06	0.00E+00	3.01E+02	0.00E+00	0.00E+00
EEE	MJ	4.10E-05	0.00E+00	0	2.80E-05	0.00E+00	2.10E+02	0.00E+00	0.00E+00
EET	MJ	6.20E-04	0.00E+00	0	4.24E-04	0.00E+00	3.17E+03	0.00E+00	0.00E+00

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9.0 E-03 = 9.0\*10<sup>-3</sup> = 0.009"

### Biogenic Carbon Content

Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	1.32E+02
Biogenic carbon content in accompanying packaging	kg C	0.00E+00

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, Denmark (kWh)	ecoinvent 3.6	338.20	g CO <sub>2</sub> -eq/kWh

### Dangerous substances

The product contains no substances given by the REACH Candidate list.

### Indoor environment






## Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO <sub>2</sub> -eq	2.09E+02	1.81E+02	0	3.98E-01	1.98E+00	3.73E+00	1.54E-01	-1.78E+02

GWPI-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

## Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.  
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.  
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.  
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.  
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.  
 Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21  
 EPD generator for NPCR 015 Part B for Wood-based products, Background information for EPD generator application and LCA data, NPCR Part A: Construction products and services. Ver. 2.0, 24.03.2021 EPD Norway.  
 NPCR 015 Part B for wood and wood-based products , Ver. 4.0, 07.10.2021, EPD Norway.

 Powered by EPD-Norway	<b>Program operator and publisher</b> EPD-Global Postboks 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-global.com
	<b>Owner of the declaration:</b> Sindal Trappen ApS Spurvevej 10, 9870 Sindal, Denmark	Phone: +45 61 30 80 29 e-mail: mail@sindaltrappen.dk web: https://sindaltrappen.dk/
	<b>Author of the Life Cycle Assessment</b> LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	<b>Developer of EPD generator</b> LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal